




BILIGHT MODELI S UGRAĐENIM IZMJENJIVAČEM TOPLINE

GCV9S (L) 100 44 20 B11
TSRC

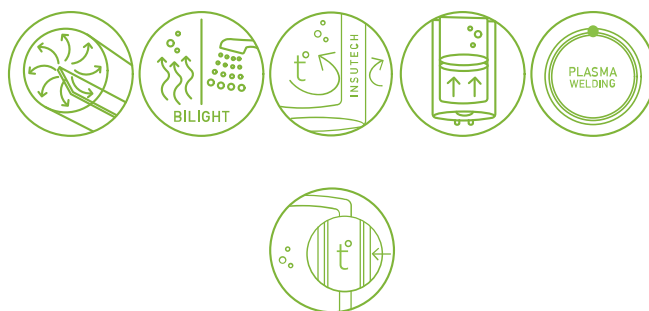

Zapremina	96 L
Visina	0.985 m
Širina	0.440 m
Propisana snaga	2000 W
Dubina	0.467 m
Instalacija	Вертикален
Vrijeme zagrijavanja - Δt 45K (15 \square - 60 \square) / **80 \square	0:18 h:min
Energetski razred	C
Promjer	440 mm
Površina izmjenjivača	0.7 m ²
Zapremina izmjenjivača	3.2 L
Konstantni protok sanitarne vode pri Δ T35 \square / *60-80 \square	433 L/h
Izmjena snage u kontinuiranom režimu *60-80 \square	18.5 kW

