


# Sensira FTXF

Zidni klima-uređaj



## Karakteristike i funkcije

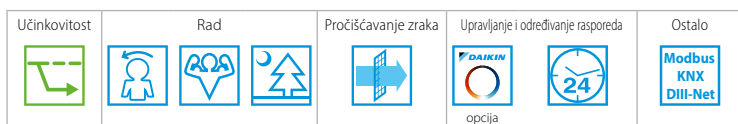

Energetska učinkovitost		FTXF + RXF	20D + 20D	25D + 25D	35D + 35D	42D + 42D	50D + 50D	60D + 60D	71D + 71D	
Rashladni učin	Min./Nom./Max.	kW	1,3/2,0/2,4	1,3/2,5/2,8	1,3/3,3/3,8	1,4/4,2/4,3	1,7/5,0/6,0	1,7/6,0/7,0	2,3/7,1/7,3	
Učin grijanja	Min./Nom./Max.	kW	1,3/2,4/3,3	1,3/2,8/3,7	1,3/3,5/4,4	1,4/4,6/5,0	1,7/6,0/7,7	1,7/6,4/8,0	2,3/8,2/9,0	
Prijključna snaga	Hlađenje	Min./Nom./Max.	kW	0,31/0,592/0,72	0,31/0,772/1,05	0,31/1,00/1,40	0,31/1,27/1,50	-1,50/-	-1,85/-	-2,77/-
	Grijanje	Min./Nom./Max.	kW	0,25/0,640/0,95	0,25/0,750/1,11	0,25/0,940/1,50	0,25/1,24/1,40	-1,62/-	-1,63/-	-2,21/-
Hlađenje	Oznaka energetske učinkovitosti					A++			A	
	Učin Pdesign	kW	2,00	2,50	3,50	4,20	5,00	6,00	7,10	
	SEER			6,50			6,21	6,15	5,15	
Space heating (Average climate)	Godišnja potrošnja energije	kWh/a	108	135	188	226	282	342	483	
	Oznaka energetske učinkovitosti					A+			A	
	Učin Pdesign	kW	2,20	2,40	2,60	3,30	4,60	4,80	6,20	
	SCOP/A			4,11		4,30	4,06		3,81	
Godišnja potrošnja energije	kWh/a	749	817	885	1.075	1.585	1.654	2.275		

Tehnički podaci - unutarnja jedinica			FTXF	20D	25D	35D	42D	50D	60D	71D
Dimenzije	Jedinica	Visina x Širina x Dubina	mm	286x770x225				295x990x263		
Filter za zrak	Tip			Uklonjiv/periv						
Razina zvučnog tlaka	Hlađenje	Tihi/Niski/Srednji/Visoki	dBA	20/25/33/39	20/26/33/40	20/27/34/43	22/30/36/45	31/34/39/43	33/36/41/45	34/37/42/46
	Grijanje	Tihi/Niski/Srednji/Visoki	dBA	21/28/34/39	21/28/34/40	21/29/35/40	22/28/34/44	30/33/38/42	32/35/40/44	33/36/41/45

Tehnički podaci - vanjska jedinica			RXF	20D	25D	35D	42D	50D	60D	71D
Dimenzije	Jedinica	Visina x Širina x Dubina	mm	550x658x275				734x870x373		
Razina zvučnog tlaka	Hlađenje	Nom./High	dBA	-46		-48		47/-	49/-	52/-
	Grijanje	Nom./High	dBA	-47		-48		49/-		52/-
Radno područje	Hlađenje	Okolina Min.~Max.	°CDB	-10~48						
	Grijanje	Okolina Min.~Max.	°CDB	-15~24						
Radna tvar	Tip / GWP / Punjenje		kg / TCO <sub>Eq</sub>	R-32/675/0,45/0,30	R-32/675/0,55/0,37	R-32/675/0,75/0,51	R-32/675/0,90/0,61	R-32/675/1,15/0,78		
Dimenzije priključka	Duljina cijevi	VJ - UJ Max.	m	20						
	Visinska razlika	UJ - VJ Max.	m	12						
Napajanje	Faza / Preporučeni osigurač (MFA)		A	1~ / 16				1~ / 20		

Provjerite objašnjenja karakteristika i funkcija na stranici 39.

