

ARKS



KVALITETA

- plastični unutarnji spremnik otporan na koroziju
- anti vakuum
- termostatska zaštita protiv visoke temperature
- ventilirani spremnik

DIZAJN

- kompaktna veličina



jedno izljevno mjesto

TEHNIČKI PODACI


		ARKS 5U EU	ARKSH 5U EU	ARKS 50 EU	ARKSH 50 EU
Kapacitet	l	5	5	5	5
Snaga	W	2000	2000	2000	2000
Napon	V	230	230	230	230
Vrijeme zagrijavanja ($\Delta T=45\text{ }^{\circ}\text{C}$)	h:m	9	9	9	9
Maksimalna radna temperatura	$^{\circ}\text{C}$	75	75	75	75
Raspršivanje topline	kWh/24h	0,25	0,25	0,25	0,25
Maksimalni radni tlak	bar	0	0	0	0
Težina	kg	3,3	3,3	3,3	3,3

UKUPNE DIMENZIJE


		ARKS 5U EU	ARKSH 5U EU	ARKS 50 EU	ARKSH 50 EU
a	mm	250	250	270	270
b	mm	385	385	417	417
c	mm	184	184	195	195
d	mm	-	-	304	304

KOD

	3100526	3100659	3100525	3100658
Erp razred	A	A	A	A
Oznaka kapaciteta	XXS	XXS	XXS	XXS



ARKS-ARKSH 5 U

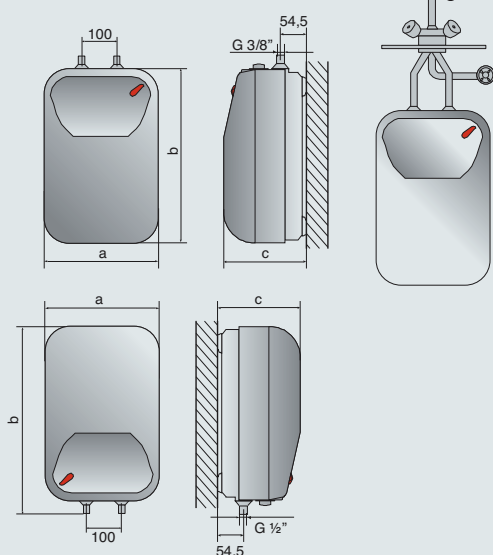

ARKS-ARKSH 5 O