



# Wall-mounted type

2017 CATALOGUE  
AIR CONDITIONERS



G 17/15B



## Amber

- |                          |                          |                     |  |        |                        |             |               |                |               |                 |
|--------------------------|--------------------------|---------------------|--|--------|------------------------|-------------|---------------|----------------|---------------|-----------------|
| Intelligent Auto Restart | Comfortable Sleep Curves | Cold Air Prevention | LED Display  | Timer  | Intelligent Defrosting | Auto Clean  | Turbo Button  | Self-diagnosis | Dehumidifying | Auto Restart    |
| 3D Airflow               | Mono&Multi Compatible    | -15°C Cooling       | Quiet Design   | I Feel | Energy Saving          | 8°C Heating | -22°C Heating | Cold Plasma    | Wifi Control  | Healthy Filters |
| -18°C Cooling            | -30°C Heating            | 54°C Cooling        | Features: <input type="radio"/> Standard <input checked="" type="radio"/> Optional |        |                        |             |               |                |               |                 |

### I feel

The mini sensor in the remote controller can sense its surrounding temperature, and transmit the signal back to the indoor unit. So the unit can adjust the air flow volume and temperature accordingly so as to provide maximum comfort.




Remote with I Feel



Remote without I Feel

### High efficiency A+++

PM2.5 has been the main contamination in the air. Gree Crown series air conditioner can remove dust and PM2.5 efficiently and provide you with a clean and comfortable living environment.

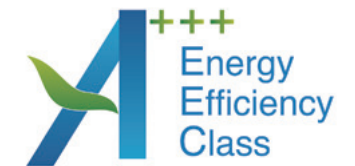

### 4-way air outlet

The louver can be vertically or horizontally adjusted so as to maximize comfort in the room.



### R32 Eco-friendly refrigerant

No damage to ozone layer; Higher heating exchange efficiency





Model			GWH09YC-K6DNA1A	GWH12YC-K6DNA1A	GWH18YC-K6DNA1A	GWH24YE-K6DNA1A	
Function			Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	
Capacity	Cooling	Btu/h	9200(3070.8-12965.6)	12000(3400-13000)	18084 (4299-22519)	24000 (3700-30900)	
	Heating	Btu/h	10000(2388-15013)	13000(4100-15010)	19005 (3821-23202)	24500 (5800-34800)	
Pdesign(A)/Pdesign(W)/Pdesign(C)		KW	2.8/3.2/4	3.2/3.2/4.8	4.5/4.6/6.4	6.4/7.1/6.4	
SEER/SCOP(A)/SCOP(W)/SCOP(C)		W/W	8.5/4.6/5.4/3.8	8.5/4.4/5.1/3.5	7.0/4.1/5.2/3.4	7.0/4/5.2/3.4	
Energy Class Cool/Heat(A)/Heat(W)/Heat(C)			A+++/A++/A++/A	A+++/A+/A+++/A	A++/A+/A+++/A	A++/A+/A+++/A	
Power Supply		Ph,V,Hz	1Ph,220-240V,50Hz	1Ph,220-240V,50Hz	1Ph,220-240V,50Hz	1Ph,220-240V,50Hz	
Power Input	Cooling	W	585	950	1550	2000	
	Heating	W	650	975	1428	1845	
Rated Current	Cooling	A	6.4	6.4	10.9	16.4	
	Heating	A	7.6	7.6	11.5	16.9	
Airflow Volume		Indoor	m³/h(SHH·MML)	660/590/540/490/450/420/390	680/590/540/490/450/420/390	850/750/680/610/560/520/480	1250/1100/1000/950/900/850/750
<b>Indoor Unit</b>							
Sound Power Level		Indoor	dB(A)(SHH·MML)	41/39/37/35/33/31/24	58/53/52/50/48/46/40	49/45/43/41/39/37/34	65/61/58/56/54/52/50
Outline Dimension		WxHxD	mm	865*290*210	865*290*210	996*301*225	1101*327*249
Package Dimension		WxHxD	mm	931*281*379	931*281*379	1060*380*322	1167*405*354
Net Weight/Gross Weight		Indoor	kg	10.5/12.5	11/13	13.5/16.5	16.5/20
<b>Outdoor Unit</b>							
Sound Power Level		Outdoor	dB(A)	52	62	57	70
Piping Connection	Gas	mm	φ9.52	φ9.52	φ12	φ16	
	Liquid	mm	φ6	φ6	φ6	φ6	
Outline Dimension		WxHxD	mm	848*596*320	848*596*320	955*700*396	955*700*396
Package Dimension		WxHxD	mm	881*363*645	881*363*645	1029*458*750	1029*458*750
Net Weight/Gross Weight		Outdoor	kg	33.5/36.5	33.5/36.5	45/49.5	53/57.5
Loading Quantity	40'GP	sets	198	198	125	114	
	40'HQ	sets	229	229	145	131	

## For North Europe



Model			GWH09YD-S6DBA2A *	GWH12YD-S6DNA2A *	GWH18YE-S6DBA2A *	GWH24YE-S6DBA2A *	
Function			Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	
Capacity	Cooling	Btu/h	9000	12000	18084	24000	
	Heating	Btu/h	9000	13000	19000	24000	
EER/COP		W/W	4.4/4.4	3.5/3.5/4.8	4.02/4.22	7000(btu/h)	
SEER/SCOP(A)/SCOP(W)/SCOP(C)		W/W	8.5/5.1	8.5/5.1(A)/5.1(W)/3.4(C)	6.6/4.4/5.1/3.4	6.5/4.1/5.3/3.5	
Energy Class Cool/Heat(A)/Heat(W)/Heat(C)			A+++/A+++	A+++/A+++/A+++/A+++/A+++/	A++/A+/A+++/A	A++/A+/A+++/A	
Power Supply		Ph,V,Hz	1Ph 220-240V~50/60Hz	1Ph 220-240V~50/60Hz	1Ph 220-240V~50/60Hz	1Ph 220-240V~50/60Hz	
Power Input	Cooling	W	600	900	1320	1850	
	Heating	W	600	950	1320	1750	
Rated Current	Cooling	A	3.95	4.2	13	16.4	
	Heating	A	3.89	4.4	18	16.4	
Airflow Volume		Indoor	m³/h(SHH·MML)	720	850	1200/1150/1050/950/850/780/600	1200
<b>Indoor Unit</b>							
Sound Power Level		Indoor	dB(A)(SHH·MML)	43/39/37/35/33/31/24	46/44/41/39/37/31/24	48/45/43/40/37/35/33	64/60/57/55/53/51/49
Outline Dimension		WxHxD	mm	996*301*225	996*301*225	1101*327*249	1101*327*249
Package Dimension		WxHxD	mm	1060*380*322	1060*380*322	1167*405*354	1167*405*354
Net Weight/Gross Weight		Indoor	kg	13.5/16.5	13.5/16.5	16.5/20	16.5/20
<b>Outdoor Unit</b>							
Sound Power Level		Outdoor	dB(A)	53	56	56	68
Piping Connection	Gas	mm	φ9.52 / 3/8"	9.52 / 3/8"	16/ (5/8")	16/ (5/8")	
	Liquid	mm	φ6 / 1/4"	6 / 1/4"	6/ (1/4")	6/ (1/4")	
Outline Dimension		WxHxD	mm	899*596*378	899*596*378	980*790*427	980*790*427
Package Dimension		WxHxD	mm	948*420*645	948*420*645	1083*855*488	1083*855*488
Net Weight/Gross Weight		Outdoor	kg	45/48	45/48	62.5/67.5	65/70
Loading Quantity	40'GP	sets	156	156	86	86	
	40'HQ	sets	180	180	108	108	

1. The product with \* is under development, and the parameters are estimated, please refer to the value on nameplates.  
2. Gree reserves the right to modify the specifications without prior notice. Please confirm the final specifications with sales representatives.



## Viola

-15°C Cooling	I Feel	Comfortable Sleep Mode	Cold Air Prevention	LED Display	Timer	Intelligent Defrosting	Auto Clean	Automatic Operation	Turbo Button	Clock Display
Compact Design	Self-diagnosis	Auto Restart	Lock	Mono&Multi Compatible	Healthy Filters	Golden Fin	Cold Plasma	-22°C Heating	Wifi Control	1 W Standby

Features:  Standard  Optional