

## DOLLE SW26-5




### **SIZE 120 X 70 - WITH 20 MM INSULATION**

DOLLE SW26-5 with 20 mm insulation is a 3-section folding attic ladder, which requires no headroom or storage space in the loft. Draught excluder contained in casing and trapdoor with 20-mm insulation prevents loss of heat and draught. Non-slip treads for extra security. Specially developed height adjustment system. Ladder assembled for easy and quick installation.

## PRODUCT DATA

PRODUCT NAME	Dolle SW26-5
TYPE	3-section
MATERIAL	wood
PRODUCT-NO.	22575
FLOORHEIGHT	Max. 280 cm
OUTLET IN CM	137,7 cm
OUTSIDE WIDTH IN CM	162 cm
NUMBER OF TREADS	12
OPENING SIZE	120x70 cm
INSULATION	20 mm
MATERIAL (CASING)	Spruce
THICKNESS (CASING)	18 mm
HEIGHT (CASING)	140 mm
OUTSIDE CASING	117,5 x 67,6 cm
MATERIAL (TRAPDOOR)	White / white HDF 2 x 3
INSULATION (TRAPDOOR)	20 mm
THICKNESS (TRAPDOOR)	26 mm
THICKNESS (TREADS)	28 mm
DEPTH (TREADS)	82 mm
WIDTH (TREADS)	400 mm
RISE (TREADS)	250 mm
MATERIAL (TREADS)	Spruce
MATERIAL (STRING)	Spruce
THICKNESS (STRING)	21 mm
DEPTH (STRING)	84 mm
MAX. USERWEIGHT	Tested by EN14975 up to 265 kg, work weight 150 kg
U-VALUE W/(M²K)	1,6 tested as building component
TEST	IFT Rosenheim EN12207 Class 4

## MEASUREMENTS

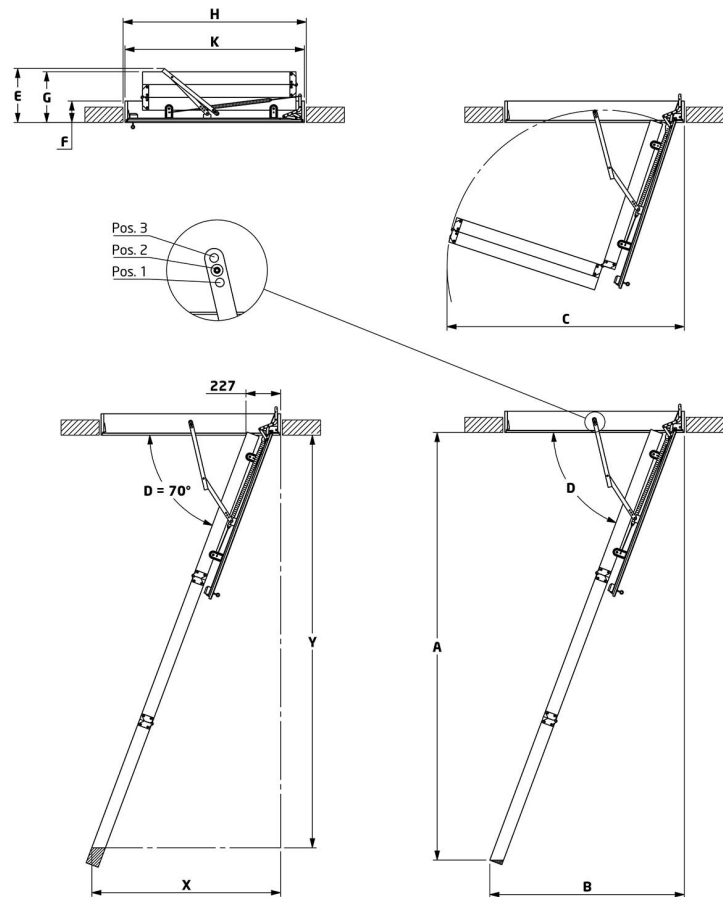

$$X = (0,374 \times Y) + 227 \text{ mm}$$

$\angle D = 70^\circ$

		Pos.	A	A+	B	C	D	E	F	G	Model	H	K
			mm	mm	mm	mm	°	mm	mm	mm		mm × mm	mm × mm
12	4-4-4	1	2754	2788	1379	1622	67	433	140	385	22565	1200 × 600	1175 × 576
		2	2801	2833	1273	1588	70	353			22575	1200 × 700	1175 × 676
		3	2845	2876	1163	1553	72	173					

22565\_M / 03-03-2016 Rev.22-11-2017