


TERMA

TERMAbad R01– straight black / ravni crni

Technical specifications / Tehnička specifikacija

Code / Šifra:	See table below Vidi tablicu niže
Description Opis	horizontal straight steel tubes 22 x 1 mm and vertical D-profile collecting tubes 40 x 30 x 1.5 mm horizontalne ravne čelične cijevi 22 x 1 mm i vertikalne cijevi za odvajanje D profila od 40 x 30 x 1,5 mm
Connections Priključci	4 x 1/2" female thread for supply and return, can be switched left/right, 1x air vent, 1x blind plug 4 x 1/2" unutarnji navoj za polazni i povratni ventil, mogu se zamijeniti lijevo/desno, 1x odzračni pipac, 1xčep
Accessories Pribor	wall brackets, air vent, plug, screws zidne konzole, odzračni pipac, čep, vijci
Color / boja	Black matt / crna matt
Operating pressure Radni tlak	3-6 Bar
Test pressure Ispitni tlak	8 Bar
Operating temp. Radna temperatura	max. 110 ° C

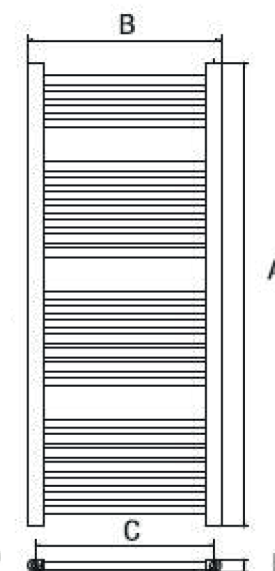

TERMA

Code / Šifra	Hight / Visina A (mm)	Width / Širina B (mm)	Axes distance / Razmak priključaka C (mm)	Depth / Debljina (mm)	Pipe num. Broj Cijevi	Water content / Volumen L	Weight / težina KG	EN442 (Watt)	Rated thermal outputs / nazivna toplinska snaga	Thermal output in different operating conditions / Toplinska snaga u različitim uvjetima rada
G61368	1200	600	560	30	25	6,7	10,44	666	Φ30=346W Φ50=638W	$\Phi=5.8200*\Delta T^{1.2013}$
G61369	1600	600	560	30	33	8,8	13,82	881	Φ30=464W Φ50=866W	$\Phi=7.3300*\Delta T^{1.2201}$